


ZDXModemRack™

19" Rackmount Chassis

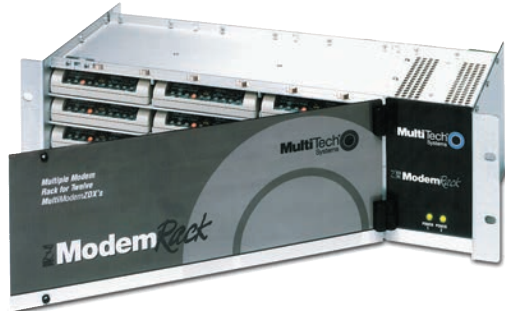


The ZDXModemRack™ chassis consolidates up to 12 Multi-Tech “ZDX-style” devices into one convenient 19" rackmount cage. It distributes power from a single wall outlet to each device utilizing an integrated redundant power supply with universal input. It is available for use with the MultiModem® ZDX and MultiModem® ZBA modems.

Features

- Standard 19" equipment rack
- 5.25" vertical height
- Holds up to 12 MultiModem ZDX or MultiModem ZBA modems
- Easy-in, easy-out – no disassembly of stand-alone modems
- Distributes power from a single wall outlet to each device
- Integrated redundancy power supply ensures power stability if one power circuit fails
- Available with power cord for 115v AC, 230v AC, or U.K. specific power source
- Two-year warranty

Benefits

- Durable rackmountable design
- Holds up to 12 Multi-Tech devices
- Integrated redundant power supply with universal input

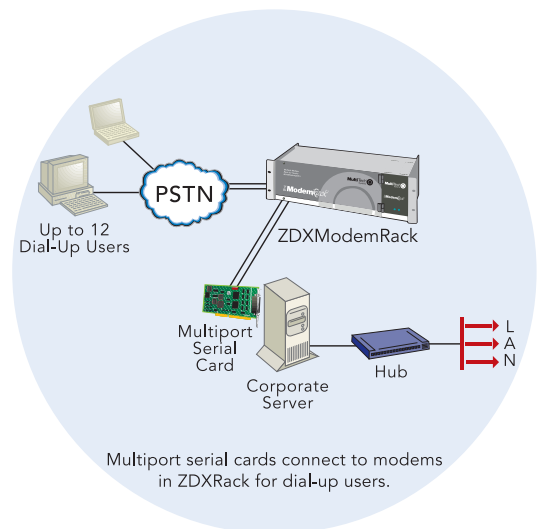

Highlights

Multiple Device Consolidation. The ZDXModemRack chassis consolidates up to 12 Multi-Tech “ZDX-style” devices into one convenient 19" rackmount cage. This clutterless organization provides the convenience of a rackmount modem system utilizing Multi-Tech’s line of standalone modems. It is available for use with the MultiModem ZDX and MultiModem ZBA modems.

Versatile Power Options. The ZDXModemRack distributes power from a single wall outlet to each device. It utilizes an integrated redundant power supply to ensure power stability if one power circuit fails. In addition, it is available with universal input.

Easy-in, Easy-out – No Disassembly Required. Each Multi-Tech modem becomes a “rackmount” modem without shedding its case. So, if the device is ever needed in its standalone form, no re-assembly is required. Simply remove the connections, slide it out of the ZDXModemRack, and reconnect it at the new site. Nothing could be simpler, more flexible, or more practical.

Available for “ZDX-Style” Devices

MultiModem ZDX

- V.92/56K download speeds and 48K upload speeds when connecting to V.92 servers
- V.44 compression
- V.17/14.4K fax, Class 1, 1.0 and 2

MultiModem ZBA

- V.92/56K download speeds and 48K upload speeds when connecting with V.92 servers
- V.44 compression
- Dial-up and 2-wire leased line support
- Class 1.0 and Class 2.1 faxing at speeds to V.34/33.6K bps (Super G3)
- Remote configuration for centralized setup and management

Comprehensive Service and Support. The Multi-Tech commitment to service means we provide a two-year product warranty and service that includes telephone technical support, 24-hour web site and ftp support.

Specifications

Physical Description

Dimensions: 19" w x 5.25" h x 7.75" d
48.3 cm x 13.3 cm x 19.7 cm

Weight: 8 lbs. (3.7kg) with power supply, 14.5 lbs. (6.6kg) with power supply and twelve modems

Connectors

IEC 320 inlet power connector on rack

Power Requirements

90 – 240v AC 50/60 Hz

Power LEDs

One for each of the supply circuits

Operating Environment

0° to +50° C

Certifications

CE Mark

EMC: FCC Part 15 Class A; EN 55022; EN 55024;
EN 61000-3-2; EN 61000-3-3

Safety: cUL, UL 60950; EN 60950

Ordering Information

Product	Description	Region
ZDXRack	12-slot Compact Device Rack	US/Can
ZDXRack-EU	12-slot Compact Device Rack	Euro/ROW
ZDXRack-GB/IE	12-slot Compact Device Rack	GB/Ireland

Made in Mounds View, MN, U.S.A.

Features and specifications are subject to change without notice.

Trademarks / Registered Trademarks: ZDXModemRack, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / All other products and technologies are the trademarks or registered trademarks of their respective holders.

World Headquarters

Tel: (763) 785-3500
(800) 328-9717
www.multitech.com

EMEA Headquarters

Multi-Tech Systems (EMEA)
United Kingdom
Tel: +(44) 118-959 7774

Multi-Tech Systems (EMEA)
France
Tel: +(33) 1 49 19 22 06